

YJ FRONT TRACK BAR BRACKET FOR 4-6" LIFT

Thank you for choosing Rough Country for your suspension needs.


Please read all the instructions before beginning the installation.

PRODUCT USE INFORMATION

As a general rule, the taller a vehicle is the easier it will roll. We strongly recommend, because of rollover possibility, that seat belts and shoulder harnesses should be worn at all times. Avoid situations where a side rollover may occur. Braking performance and capabilities are decreased when significantly larger/heavier tires and wheels are used. Take this into consideration while driving. Rough Country makes no claims regarding lifting devices and excludes any and all implied claims. We will not be responsible for any product that is altered.

INSTALLATION INSTRUCTIONS

1. Install new tracking bar bracket onto front axle housing on the passenger side, place the track bar bracket on the stock mount where the flange matches with the stock flange on the right side of the bracket as shown in **Photo 1**. Install supplied 12mm x 2 1/2" long bolt, washer and flange lock nut to secure. (Torque to 45ft/lbs). Using the hole in the new bracket as a guide, drill a 3/8" hole through the stock flange of the track bar housing as shown in **Photo 2**. Install the 3/8" x 1 1/4" bolt, washer and 3/8" flange lock nut. (Torque to 35 ft/lbs).

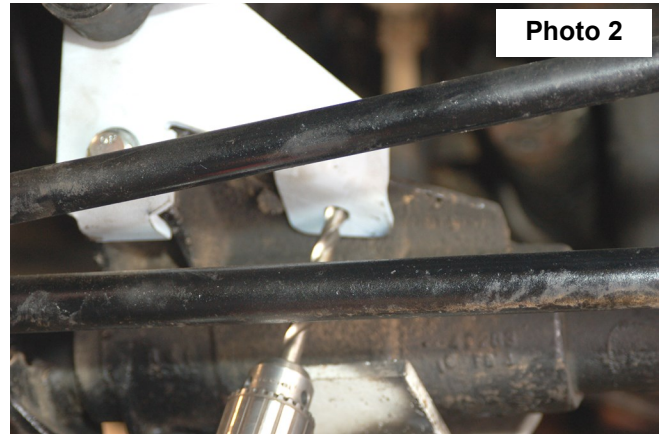

POST INSTALLATION

1. Check all fasteners for proper torque. Check to ensure there is adequate clearance between all rotating, mobile, fixed and heated members. Check steering for interference and proper working order.
2. Re torque all fasteners after 500 miles. Visually inspect components and re torque fasteners during routine vehicle service.