

# ROUGH COUNTRY

## SUSPENSION SYSTEMS®

### JEEP JL Rear Bumper w/ Tire Carrier

Thank you for choosing Rough Country for all your suspension needs.

Please read instructions before beginning installation. Check the kit hardware against the parts list. Be sure you have all needed parts and know where they go. Also please review tools needed list and make sure you have needed tools.

#### PRODUCT USE INFORMATION

Please read instructions before beginning installation. Check the kit hardware against the parts list and product layout. Be sure you have all needed parts and know where they go. Also please review tools needed list and make sure you have needed tools.

If questions exist we will be happy to answer any questions concerning the function and correct use of this product.

The installer must verify that the mounting kit does not interfere with the factory air bag sensors, which must not be relocated or modified in any way. The vehicles air bag system may not operate properly if the winch mounting kit is not mounted in compliance with the vehicle manufacturers recommendations.

#### Hardware Included:

3-2mm x 10mm Bolts  
 3-2mm Nuts  
 6-Flat Washers  
 8-8mm x 30mm Bolts  
 8-8mm Lock Washers  
 8-8mm Flat Washers  
 2-6mm x 20mm Button Head Bolts  
 4-6mm x25mm Bolts  
 4-6mm Button Head Bolts  
 4-6mm Lock washers  
 4-6mm Flat Washers  
 4-6mm Lock Nut  
 2-6mm Hex nut  
 8-6mm x18mm Washers  
 2-6mm x 12mm Washers  
 1-Cotter Pin  
 1-8mm Set Screw  
 8-14mm x 40mm Bolts  
 8-14mm Flat Washers  
 8-14mm Lock Washers

1-4mm Screw  
 1-12mm x 30mm Bolt  
 4-12mm x 50 Bolts  
 6-12mm x 70mm Bolts  
 16-12mm Flat Washers  
 4-12mm Lock Washers  
 6-12mm Lock Nuts  
 1-Pass Side Flag Nut  
 1-Upper Bearing  
 1-Lower Bearing

#### Kit Contents:

10598Box 1:  
 Rear Bumper  
 2-D-rings  
 10598Box 2:  
 Tire Carrier



#### Tools Needed:

Micro Philips Screwdriver  
 Flat Head Screwdriver  
 4mm Allen Wrench  
 8 Torx Bit  
 20 Torx bit  
 10mm Socket/Wrench  
 13mm Socket/Wrench  
 16mm Socket/ Wrench  
 17mm Socket/Wrench  
 19mm Socket/Wrench  
 21mm Socket/Wrench  
 22mm Socket/Wrench





## INSTALLATION INSTRUCTIONS



1. Remove the inner fender cover from bumper bracket using 8mm.
2. Using a 16mm socket remove the bolts from the side bumper brackets. **See Photo 1.**
3. On driver side unplug the license plate light connector and remove plastic pin from the body. **See Photo 2.**

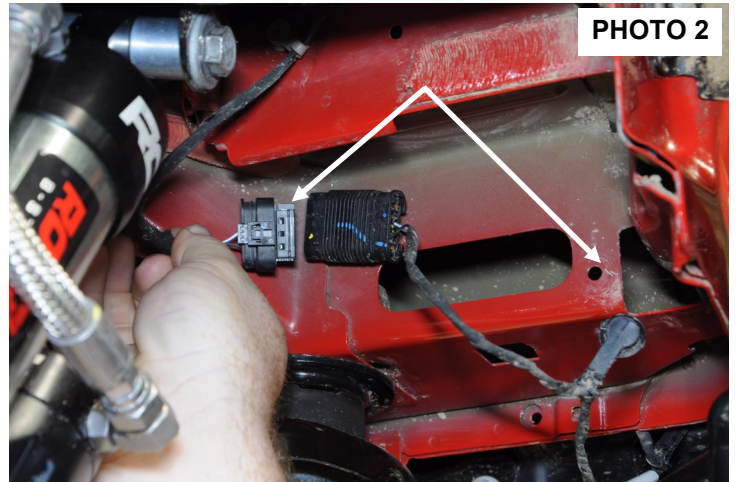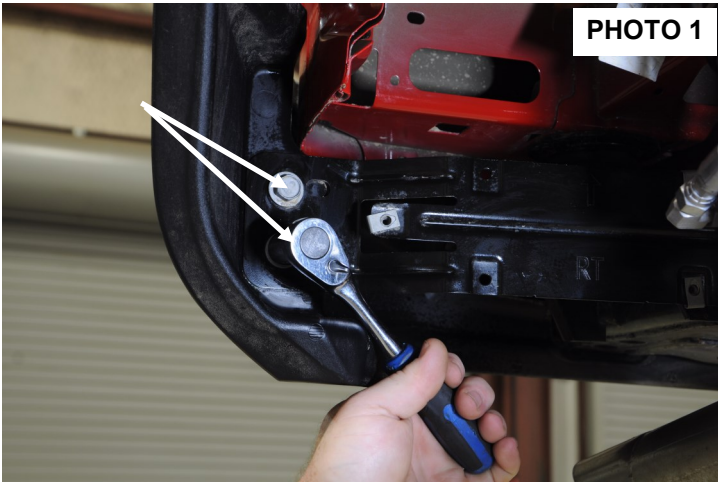



4. Unplug the rear proximity sensors if factory equipped.
5. Remove the bolts from bumper to frame using a 16mm socket. **See Photo 3.** Remove bumper from the Jeep.
6. Remove factory tow hook and both bumper frame brackets using a 18mm socket for the 4 bolts and a 21mm socket for passenger side bolts. **See Photo 4 & 5.**

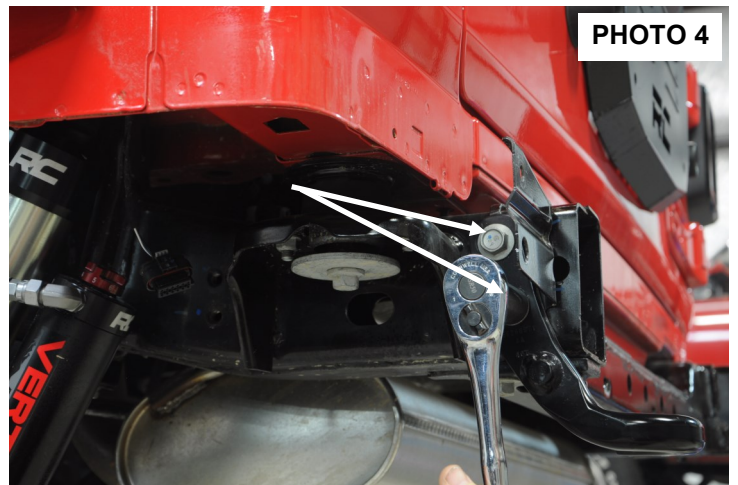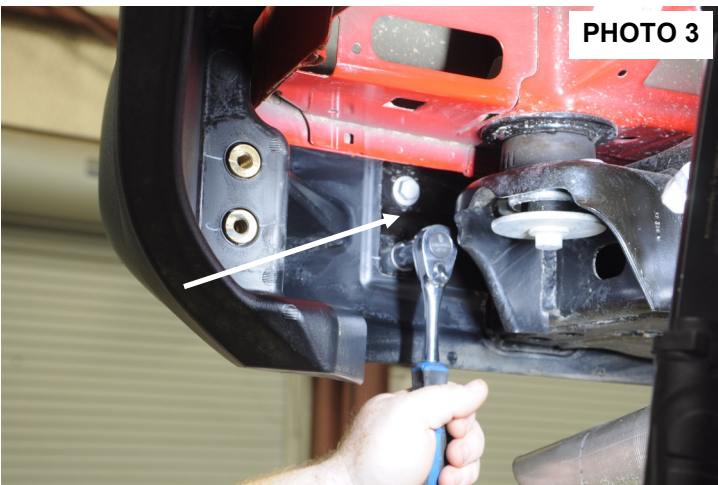



7. Remove the 7 bolts from the brake light housing using a 20 torx bit and separate the housing. **See Photo 6.**

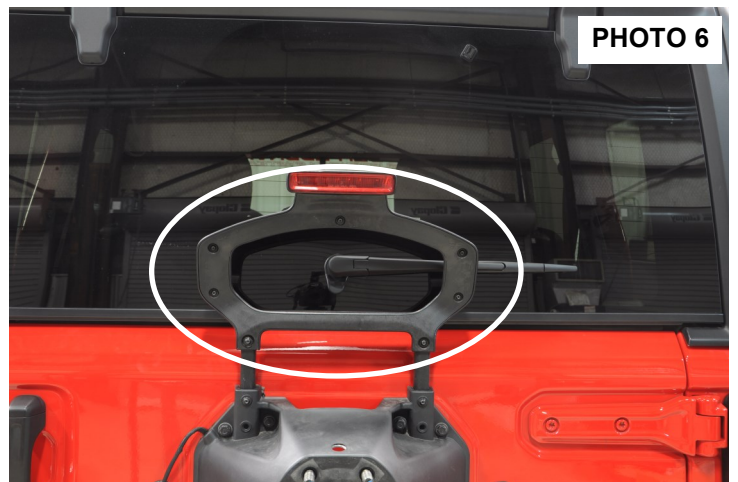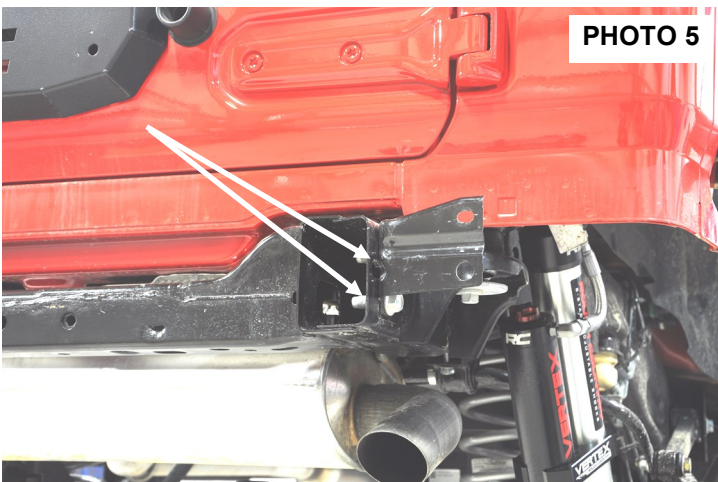



8. Using a 20 torx bit remove brake light from housing and unplug the light. **See Photo 7.** Only the brake light will be reused.
9. Remove the 2 bolts holding the camera and lug stud bracket using a 20 torx bit. **See Photo 8.**

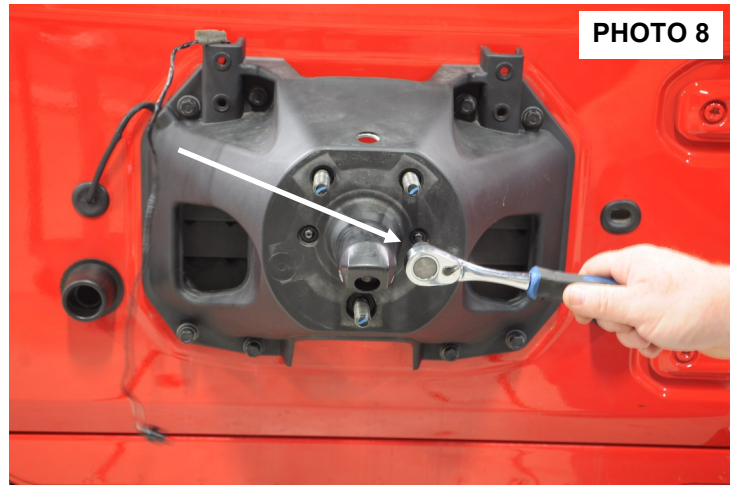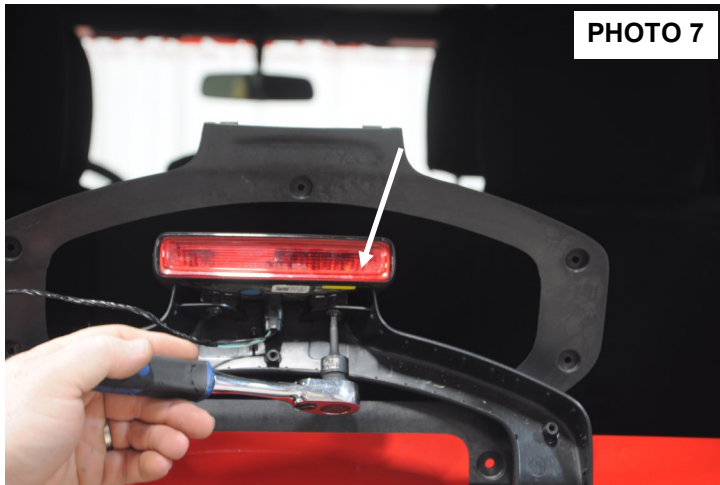


10. Remove the 8 bolts from the tire carrier using a 13mm socket. **See Photo 9.** Remove the tire carrier being careful not to let the camera hang by the wires.
11. Unclip camera wire from spare tire lug housing. Remove the 3 screws from camera using a 8torx and unplug camera. Take care not to damage or lose the screws as they are very small. **See Photo 10.**

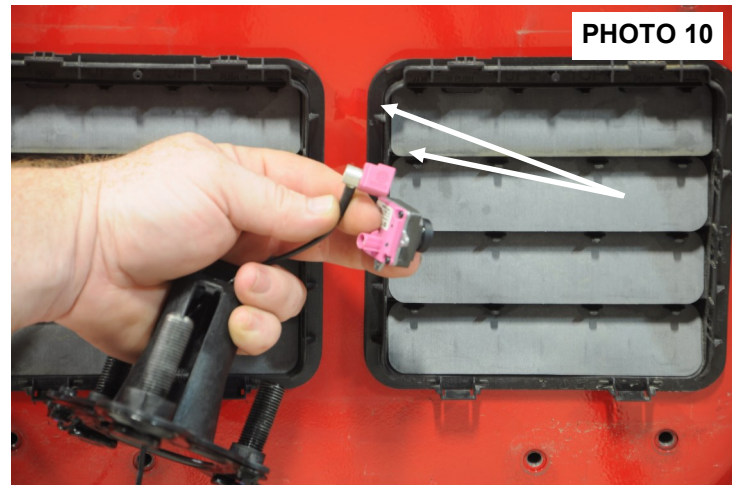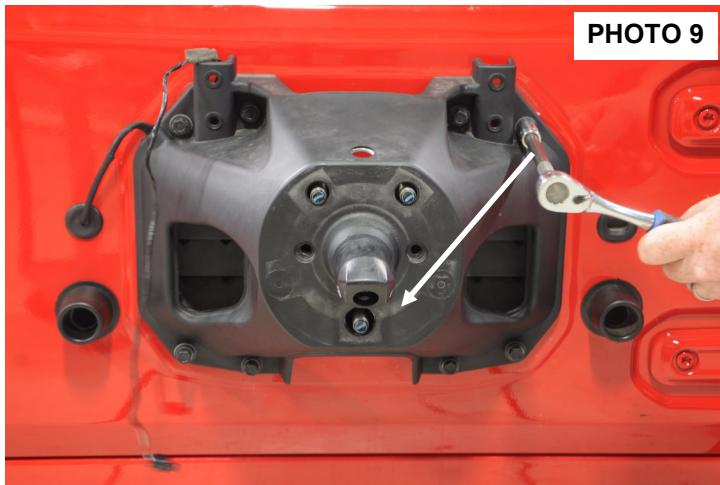



12. Remove the cabin pressure relieve from back door by using a small flat blade screwdriver pushing down on taps in between door and the gasket. Take care not to scratch the door. **See Photo 11.**
13. Install the swing gate bracket to the door using stock bolts. **See Photo 12.** Do not fully tighten bolts.

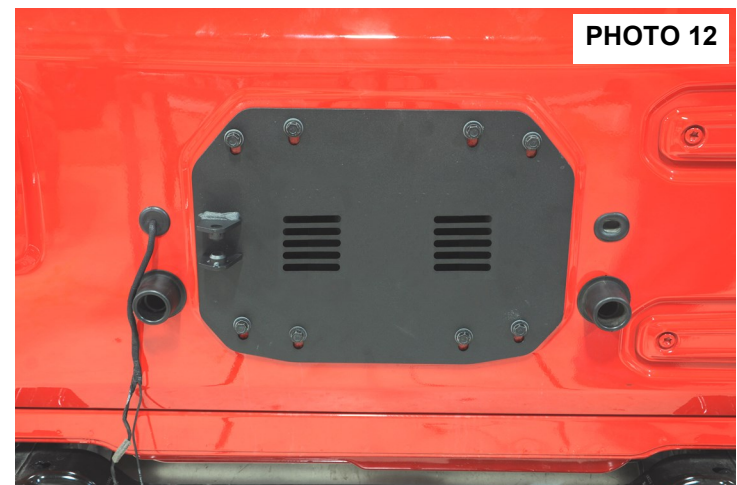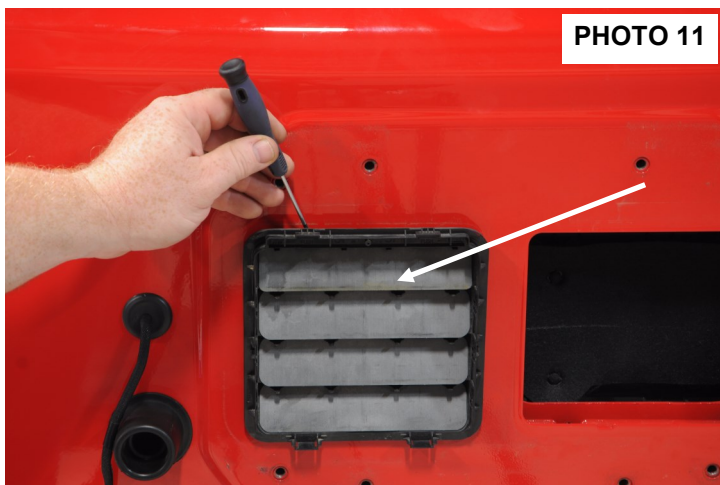



14. Install the swing gate spud into bumper using the 4 supplied 12mm x 70mm bolts, lock washers and flat washers. Tighten using a 19mm socket. **See Photo 13.**
15. Install the double flag nut into passenger side frame of the vehicle. **See Photo 14.** Note: Only 1 flag nut is used. The driver side does NOT require a flag nut.

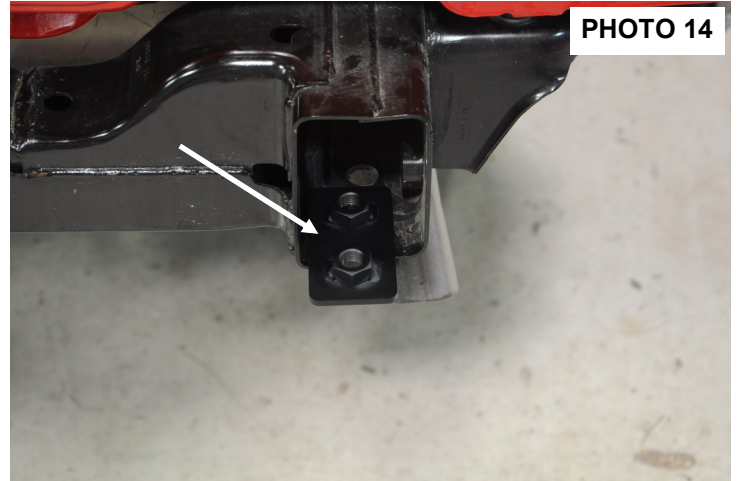

16. Install bumper using the supplied 14mm X 40mm bolts and plug up factory proximity sensors if factory equipped. **See Photo 15.** Tighten bolts using a 22mm socket
17. Install the rubber bump stop to the bump stop bracket using the 2 supplied 6mm x 25mm bolts. **See Photo 16.** Use a 10mm socket and a 4mm allen wrench to tighten. NOTE use caution not to over tighten.

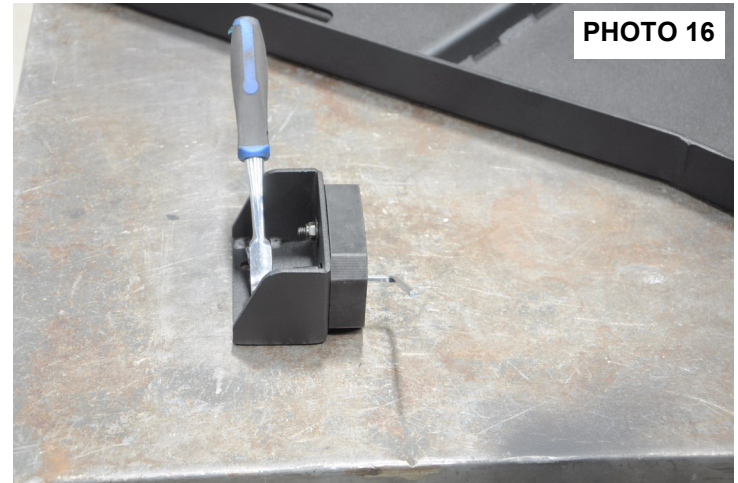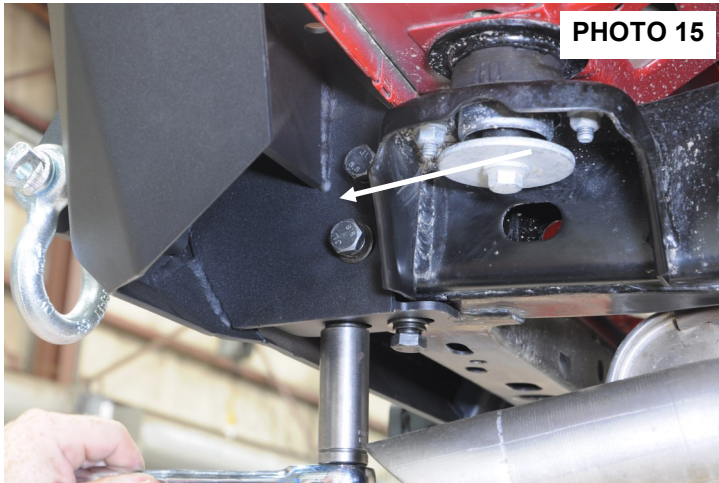

18. Install the assembled bump stop onto swing gate using the 2 supplied 6mm x 25mm bolts, washers and nuts. **See Photo 17.** Use a 4mm allen and a 10mm socket to tighten.
19. Install heim joint assembly onto swing gate using the supplied 12mm x 50mm bolt, washer and lock nut. **See Photo 18.** Use a 19mm wrench and socket to tighten.

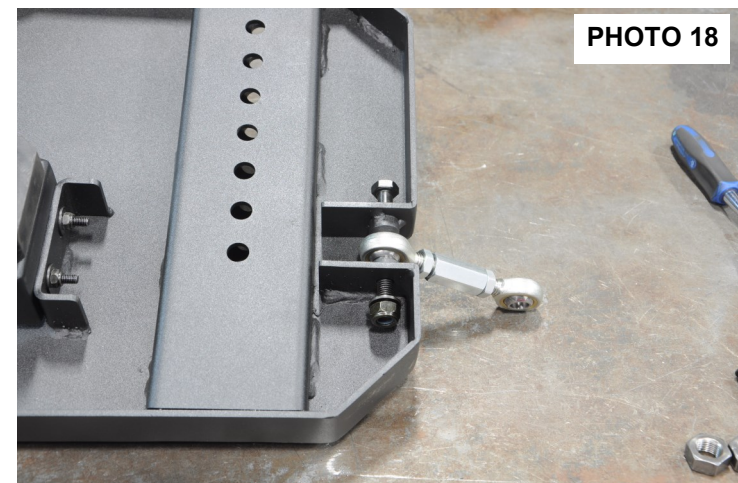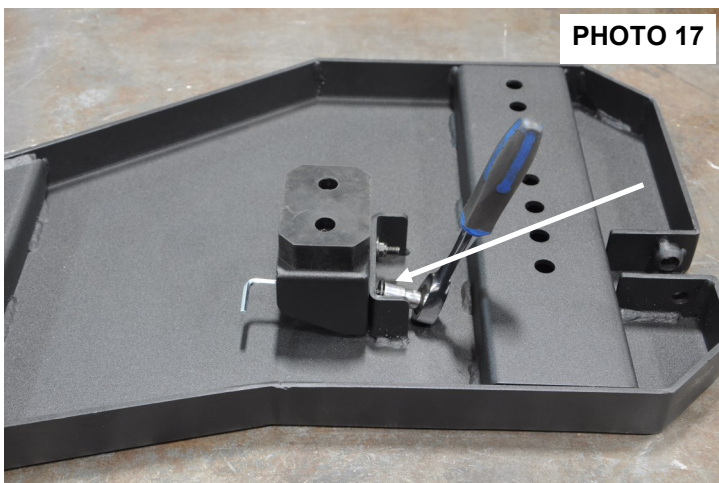


20. Install the larger bearing race in the lower tube as shown. Pack bearing with grease and install into swing gate with large washer and seal. **See Photo 19 & 20.**



21. Install smaller bearing race in upper tube and install swing gate onto spud and install top bearing, washer and nut. **See Photo 21 & 22.** Tighten nut until there is no slack in the bearings.




22. Install cotter key then set screw. Use a 4mm allen wrench to tighten. **See Photo 23 & 24.**

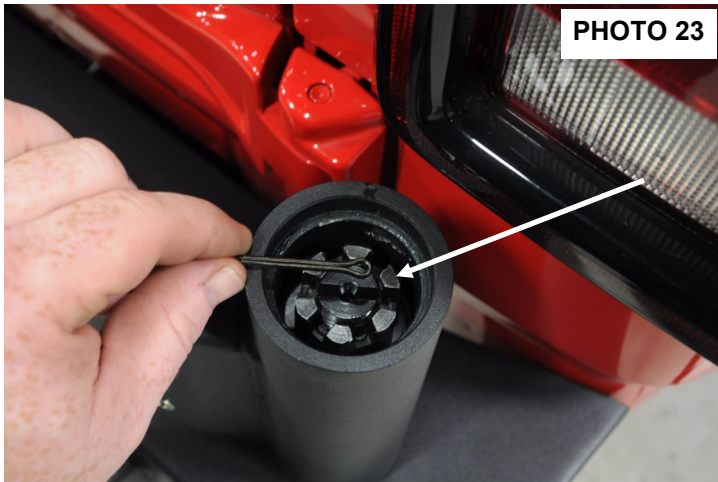


24. Install RC dust cap. **See Photo 25.**

25. Install rear tire carrier bracket using the 2 supplied 12mm x 50mm bolts, washer and nuts. **See Photo 26.** Use a 19mm wrench and socket to tighten. Kit also includes shim plates to install between this mount and the tire mount. The shim will be slid in as the tire mount is installed.

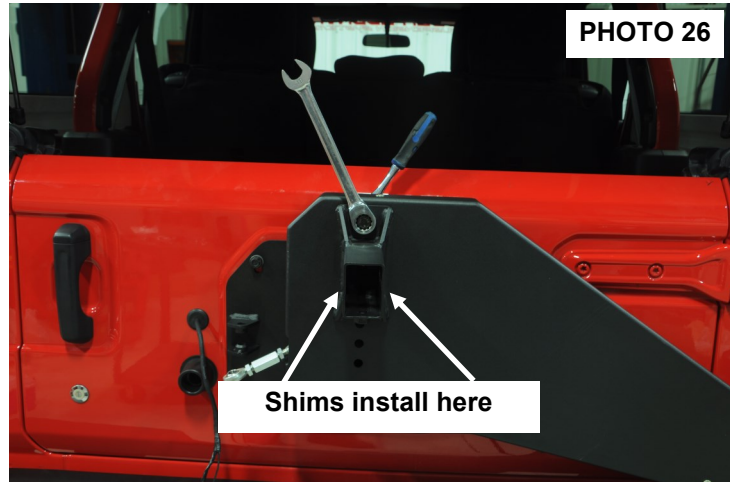



26. Install the front tire carrier bracket using the 2 supplied 12mm x 70mm bolts, washers and nuts. **See Photo 27.**

27. Install the supplied 12mm x 30mm pinch bolt as shown in **Photo 28.** Use a 19mm socket and wrench to tighten all bolts.

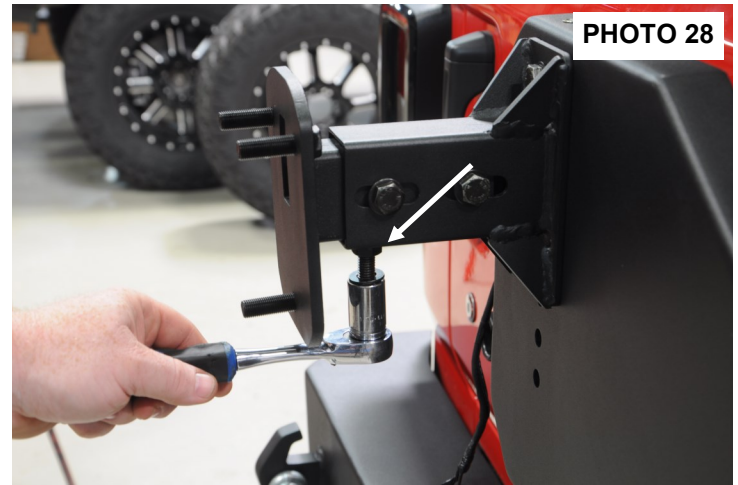


28. Attach heim joint to door using the supplied 12mm x 50mm bolt, washers and nut. **See Photo 29.** Use a 19mm socket to tighten.

29. Adjust heim joint to secure the tire carrier assembly firmly against the rubber snubber. **See Photo 30.** Tighten jam nuts using a 17mm wrench.

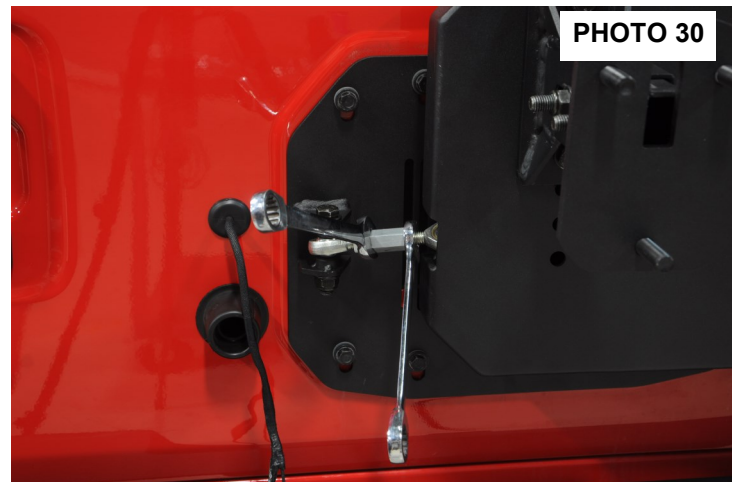
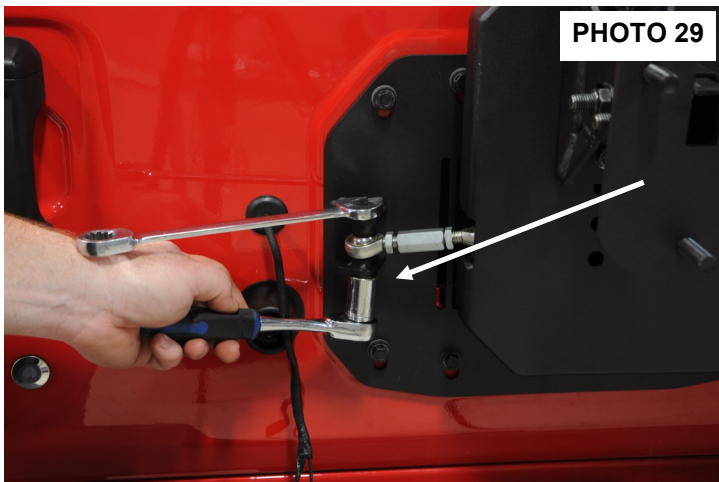


30. Route camera wire into hole on tire carrier. **See Photo 31.**

31. Install camera into the camera bracket and secure using the 3 supplied 2mm x10mm bolts, washers and nuts. **See Photo 32.** Use a micro screw driver and a 4mm socket to tighten. Do not overtighten.

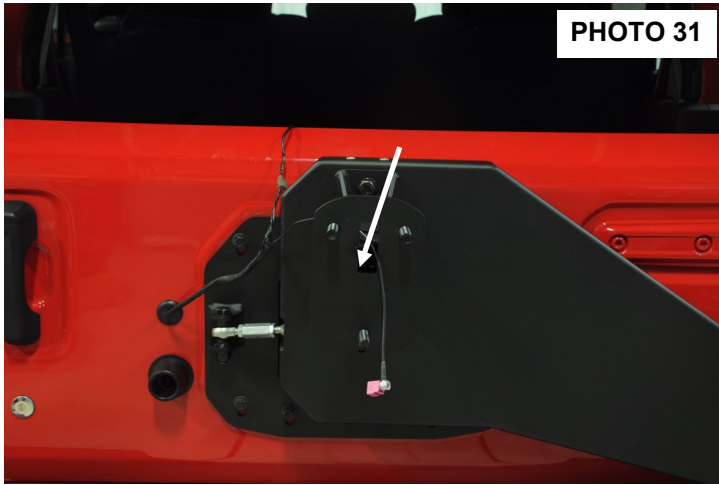


32. Install camera bracket onto carrier and plug in camera. Then install the camera cover. **See Photo 33 & 34.**

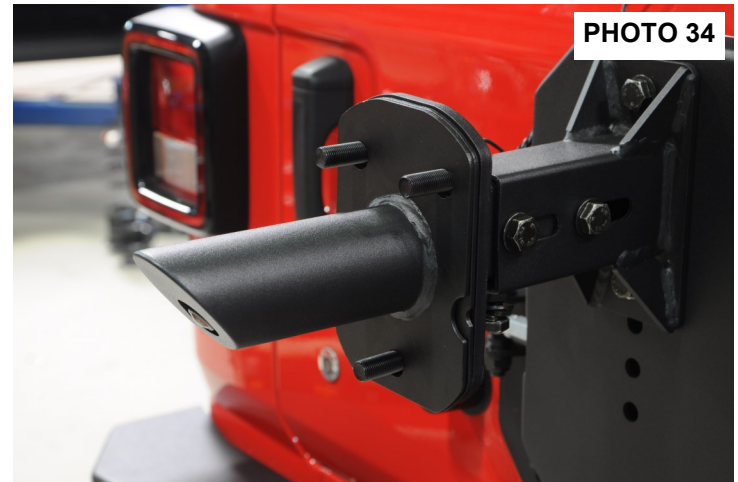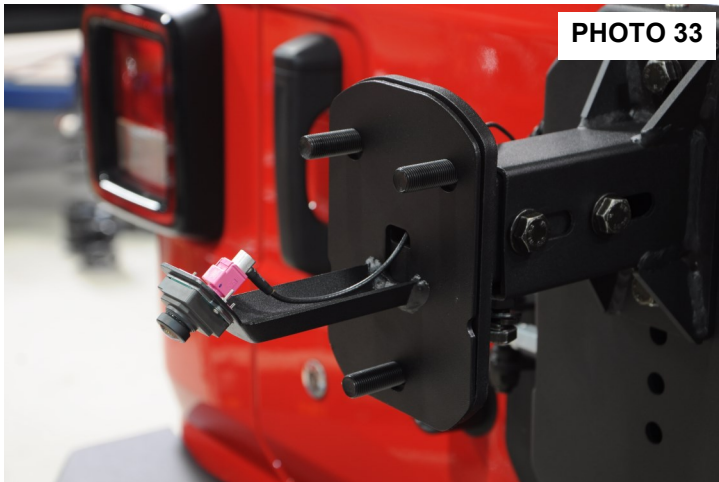


33. Install lower brake light bracket using the 2 supplied 6mm x 25mm bolts and supplied flag nut. **See Photo 35.** Use a 4mm allen wrench to tighten.

34. Install stock brake light to upper brake light mount using stock bolts. **See Photo 36.** Use a 20 torx bit to tighten.

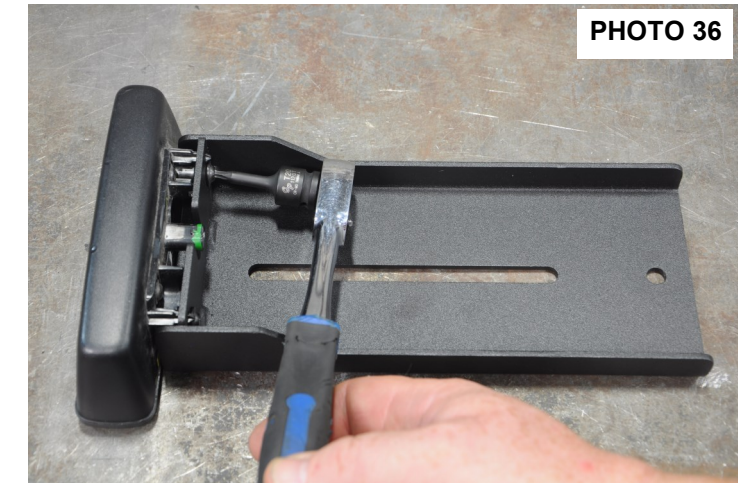

35. Install upper brake light mount to lower mount using the 2 supplied 6mm x 25mm bolts. **See Photo 37.** Adjust to fit tire size.  
36. Install license plate bracket using the 2 supplied 6mm x 25mm bolts and washers. **See Photo 38.**

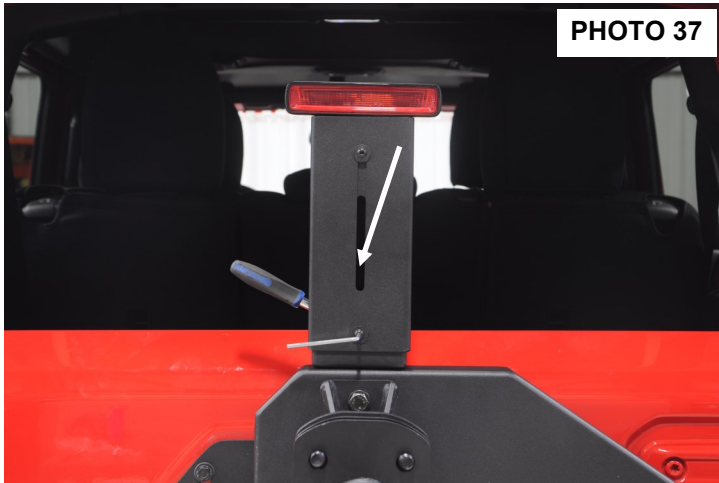

37. Install supplied small black LED license plate light in plate and route wiring out of harms way to driver side. The light will be spliced into the factory wiring for LED to function.  
38. Install spare tire on the mount. **See Photo 39.**



### **THANK YOU FOR CHOOSING ROUGH COUNTRY FOR YOUR OFF ROAD NEEDS.**

By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable , State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.

