



WARNING: This product contains a chemical known to the State of California to cause Cancer and Reproductive Harm. For more information, go to www.P65Warnings.ca.gov.

2021-UP FORD F150 2WD/4WD REAR WHEEL WELL LINER

PLEASE READ INSTRUCTIONS CAREFULLY BEFORE STARTING THE INSTALLATION.

NOTE: FOR EASIER INSTALLATION, REMOVE THE TIRE.

INCLUDED IN HARDWARE KIT:

1.



Driver Side & Passenger
Side Liner
1 pr

2.



U Clip
4 pcs

3.



Truss Head Screw
4 pcs

4.



Plastic Washer
8 pc

5.



Plastic Retainer
8 pcs

TOOLS NEEDED:

#2 Phillips Screwdriver

PREPARATIONS:

Please clean the interior panels of the rear wheel well.

If vehicle comes equipped with factory wheel well liners, these will need to be removed, along with any fasteners involved.

REAR WHEEL WELL LINER INSTALLATION



Install 2 supplied "U" Clips over factory holes at back of rear wheel well, as indicated in next step. Flat side of clip will face *out* when clip is installed.

NOTE: Factory liner must be removed prior to installation.



"U" Clip locations.




Slide the Rear Wheel Well Liner behind wheel at rear of vehicle. It is helpful to tilt the liner at a 45-degree angle at front of wheel and then straighten it out once it's behind the wheel.



Tuck Rear Wheel Well Liner behind sheet metal at lower edges, and under metal fender lip at all other outward facing edges.



Start a supplied Truss Head Screw through each hole in back of wheel well liner and into clips installed in Step 1. Tighten both screws.

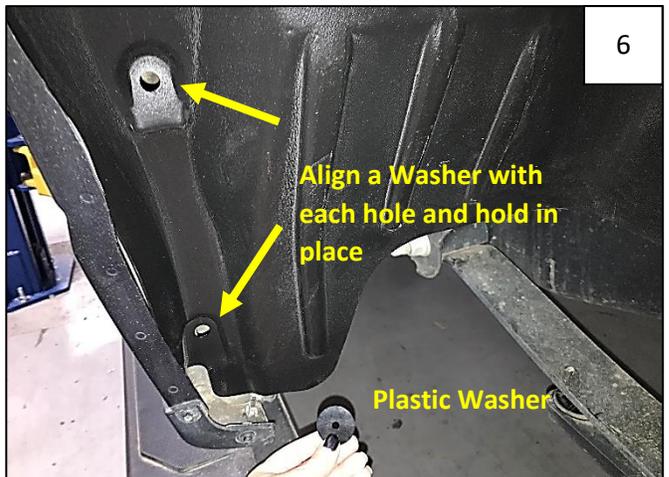

In one of two holes at front of wheel well, reach behind sheet metal and hold a supplied plastic washer behind factory hole in sheet metal (aligned with hole in wheel well liner).



While holding Plastic Washer at inside of sheet metal, insert a supplied Plastic Retainer through hole in wheel well liner, factory hole in sheet metal, and into Plastic Washer. Repeat Steps 6 and 7 for upper hole at front of wheel well.



At rear of wheel well, repeat Steps 6-7 for two holes shown in photo.



Installation is complete. Repeat for other side.